

OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER

SECTION 16 TOWNSHIP 16 RANGE 2

DATE: ~~4-15-02~~ 9-5-07

PARTY CHIEF: Wilcoxon

CREW: FD

TYPE OF MARKER: Harrison: set by Milestone

METHOD OF ESTABLISHMENT: County: 7-22-97



IN. S.P.C. E ZONE NAD '83

NAME: 16021602

N: 509670.5220(m)

E: 44239.1580(m)

46th St. 4600 N

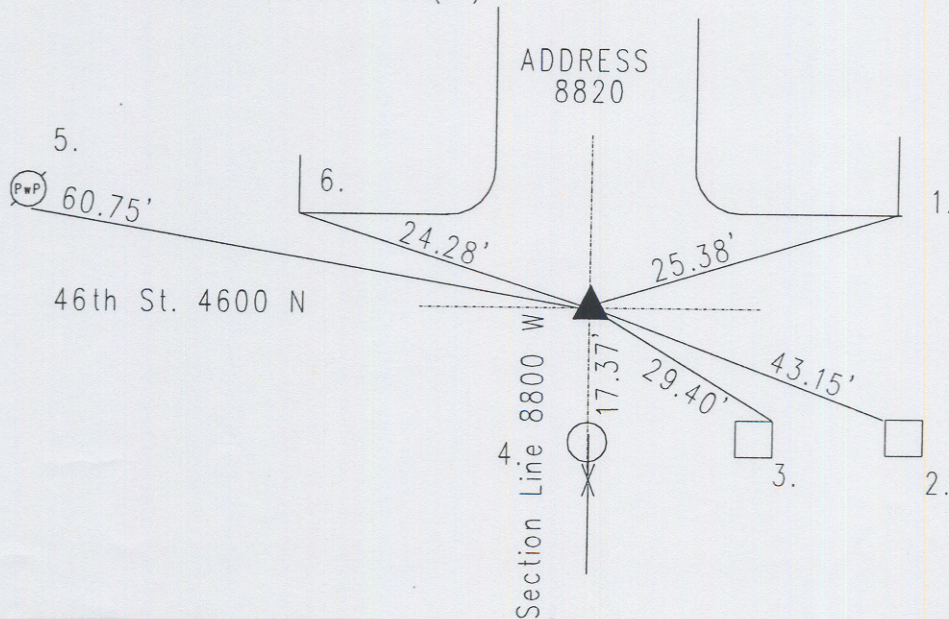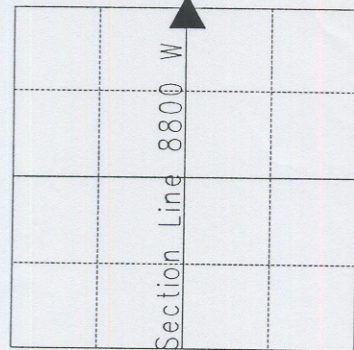

Corner originally set as a post in 1820 by Wm. B. Laughlin with the following witnesses: 10" beech bearing north 19 degrees, thence east 19 links; and a 18" dogwood bearing south 33 degrees, thence east 37 links. (M.C. Atlas p. 3) A survey by Wm. P. Smith on June 19, 1878 indicates no stone but both original witnesses. (Pike Legal Book p. 9) Corner referenced by Wilcoxon on 8/6/76 and called an iron pin. Corner referenced by Green on 9/6/85 and called an iron pin. Corner referenced by Wilcoxon on 2/8/93 and called a p.k. nail. Corner excavated by Wilcoxon on 6/16/97 and a p.k. Nail was found at the surface. No stone was found. A #205 cast iron Harrison Monument was set as per ties of new construction.

16021602

REF.	DISTANCE	DESCRIPTION
1.	25.38'	Top SE corner of concrete slab
2.	43.15'	NW corner of brick lamp column
3.	29.40'	NE corner "
4.	17.37'	PK nail E fence post 12"up
5.	60.75'	PK Nail w/washer S PwP#4-351WA 12"up
6.	24.28'	Top SW corner of concrete slab